VT.670

Our EPD Group 5 - Alps Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.


60cm

120cm







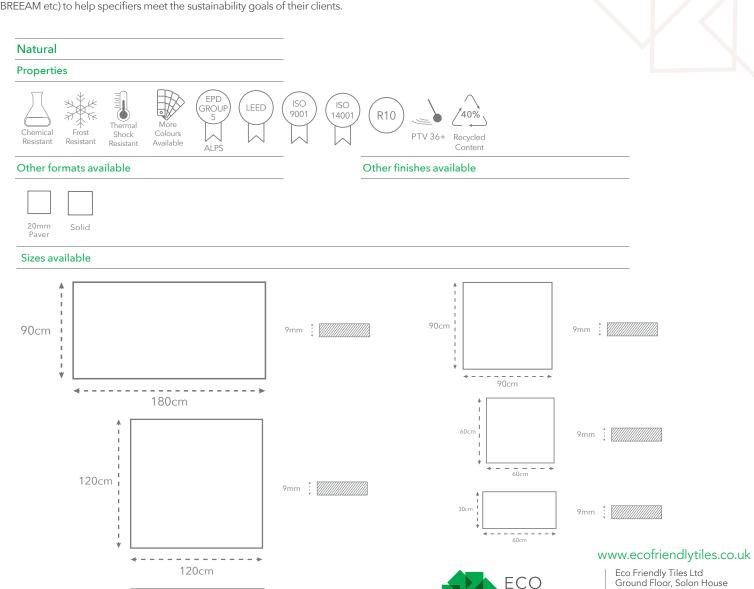

9mm

40a Peterborough Road

info@ecofriendlytiles.co.uk

London

SW6 3BN

0844 980 2233

FRIENDLY

The planet, covered

TILES®

Technical Specification Code: VT.670



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
Breaking Strength	EN ISO 10545-4	≥ 35 N/mm²	50 N/mm²
			1,800 N 9mm
			13,600 N 20mm
Abraision Resistance	EN ISO 10545-6	≤ 175 mm³	145 mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	a ≤ 7*10 ⁻⁶ °C ⁻¹
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	B Minimum	LA-HA Resistant, A Resistant
Resistance to Stains	EN ISO 10545-14	-	5
Slip Resistance	DIN 51130	-	R10
Pendulum Test Value		-	PTV 36+
Fire Reaction	EN 13823/EN 9239-1		Class A1 (wall)/Class A1 _{fl} (floor

Certifications











