
VT.685BH

Our EPD Group 5 - Alps Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.


Bush Hammered







Properties EPD GROUP 5 ISO 9001 ISO 14001 LEED More Colours Recycled Carbon Shock Resistant Resistant Content Other finishes available Other formats available 20mm Honed Paver Sizes available

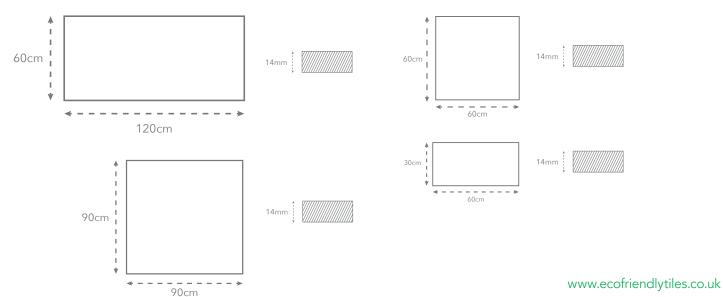



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.685BH



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Water absorption	EN ISO 10545-3	≤ 0.5%	0.05%
Breaking Strength	EN ISO 10545-4	≥ 35 N/mm²	50 N/mm²
			6.080 N 9mm
			13,600 N 20mm
Abraision Resistance	EN ISO 10545-6	≤ 175 mm³	143 mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	a ≤ 7*10 ⁻⁶ °C ⁻¹
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	B Minimum	LA-HA Resistant, A Resistant
Resistance to Stains	EN ISO 10545-14	-	5
Slip Resistance	DIN 51130	-	R11
Pendulum Test Value		-	PTV 36+
Fire Reaction	EN 13823/EN 9239-1		Class A1 (wall)/Class A1fl (floor

Certifications











